

ABLOY® INOXI PRODUCTS  
*stainless steel*



The new, stainless steel INOXI products give the designer free rein in choosing the correct fittings for demanding applications.

---

# ABLOY® INOXI LEVER HANDLES

The stainless steel INOXI lever handles feature a high-quality mounting method: a return spring that meets the highest standards and hidden screw heads.



**Inoxi 3-19/002**



**Inoxi 3-19ss/002**



**Inoxi 3-19s/002**



**Inoxi 3-19st/002**



**Inoxi 23/002**



**Inoxi 21/002**




**Inoxi 24/002**


The product range also includes a toilet turning knob 002 WC and escutcheons 002 P and PZ.




**Inoxi 002 wc**

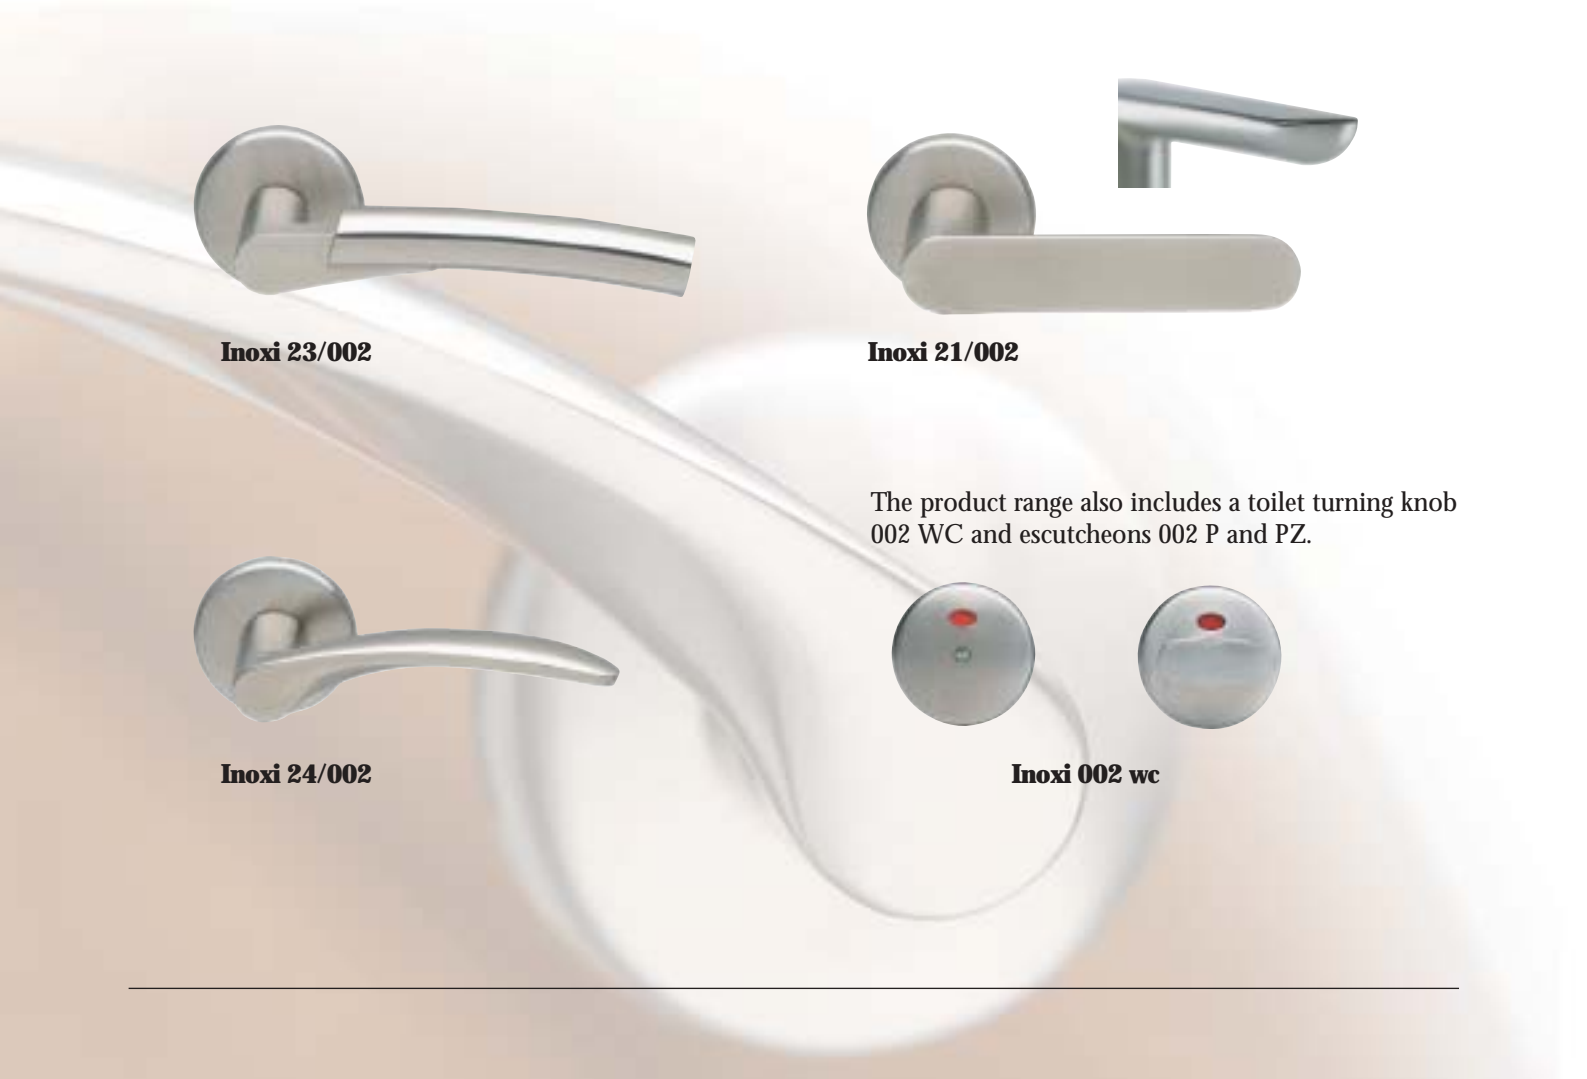


# ABLOY® INOXI LEVER HANDLES

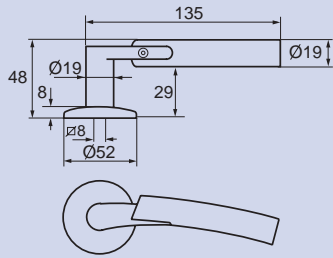


**Inxi 23/002**

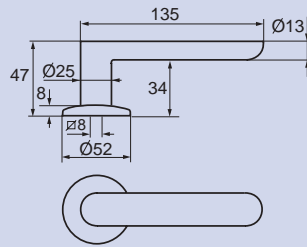


**Inxi 21/002**

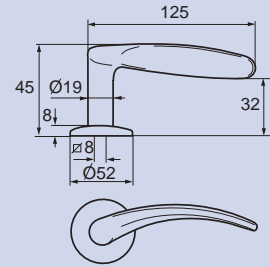


**Inxi 24/002**

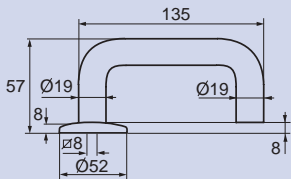


**Inxi 3-19/002**

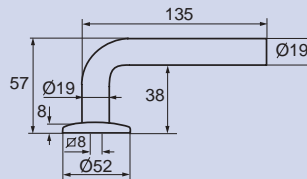


**Inxi 3-19s/002**

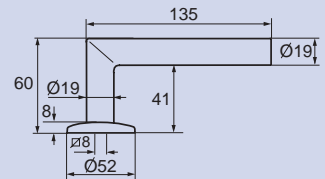


**Inxi 3-19ss/002**

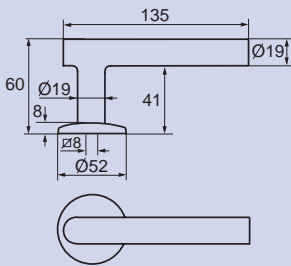


**Inxi 3-19st/002**

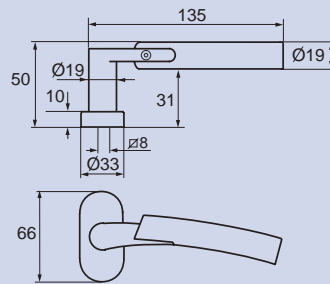


**Inxi 23/0545**

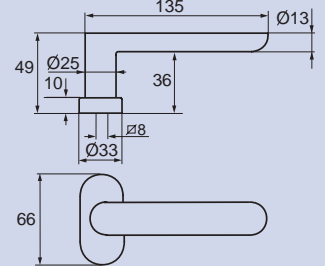


**Inxi 21/0545**

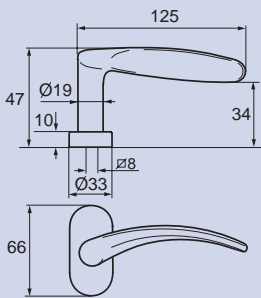


**Inxi 24/0545**

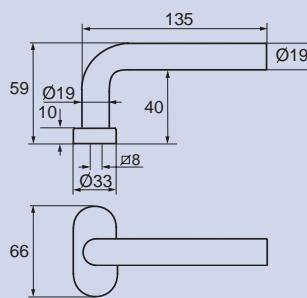


**Inxi 3-19s/0545**

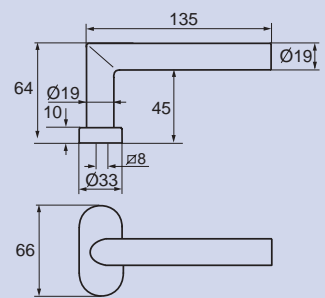


**Inxi 3-19ss/0545**

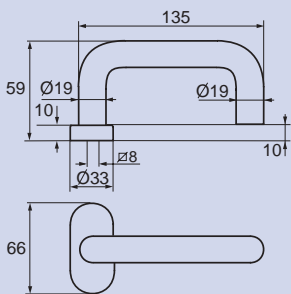

**Inxi 3-19/0545**

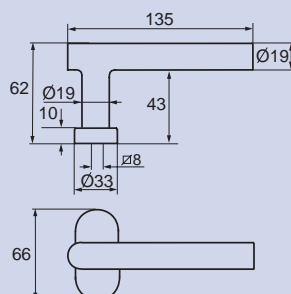


**Inxi 3-19st/0545**

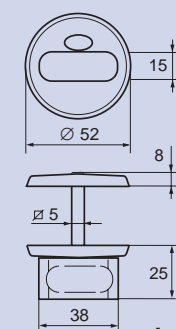


**Inxi 002 wc**


# ABLOY® INOXI PULL HANDLES

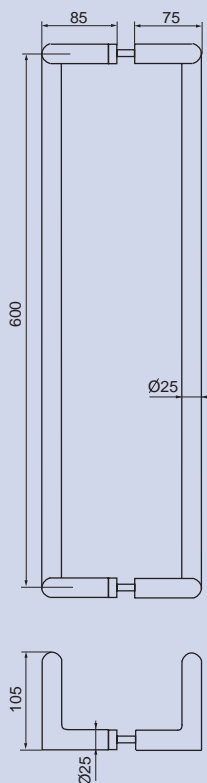


**Inoxi 138s-25/600**

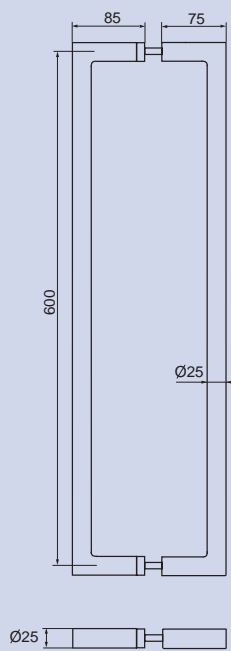


**Inoxi 137s-25/600**

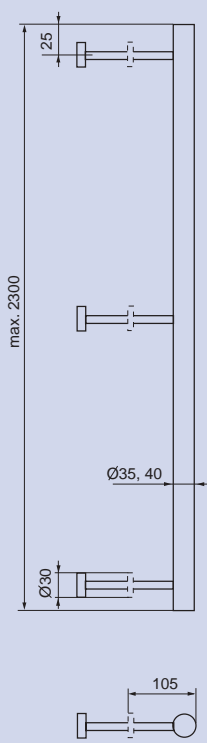


**Customized pull handle 750**

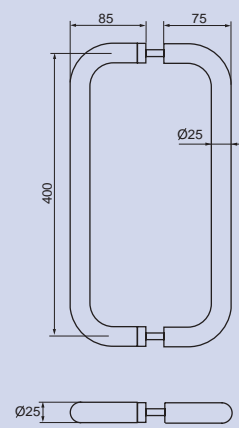


**Inoxi 137-25/400**

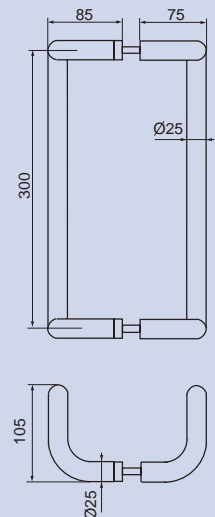


**Inoxi 138-25/300-400-600**

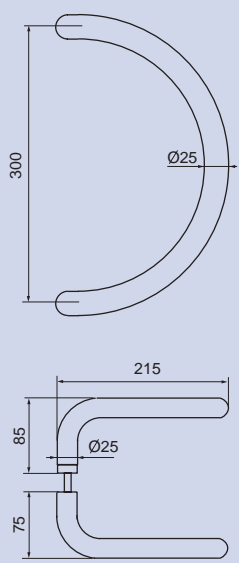

**Inoxi 291-25/300**

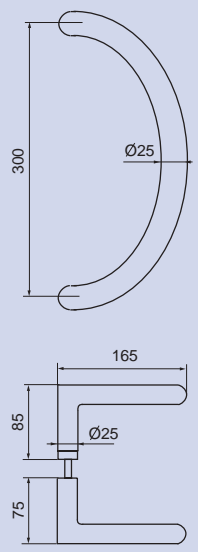

**Inoxi 291s-25/300**

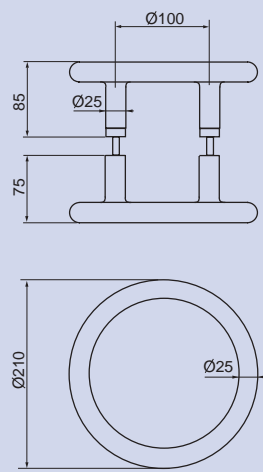

**Inoxi 292-25/210**

---

# ABLOY® INOXI PULL HANDLES

The stainless steel INOXI pull handles feature the same high-quality Presto mounting as the other ABLOY® pull handles.



**Inoxi 137-25/400**



**Inoxi 137s-25/600**



**Customised pull handle 750**

Maximum length 2300 mm, diameter 30 or 40 mm. The fixing points can be specifically dimensioned for a door. Three mounting points should be used for pull handles over 1,300 mm long and 30 mm thick.



**Inoxi 138-25/300-400-600**



**Inoxi 138s-25/600**



**Inoxi 291-25/300**



**Inoxi 291s-25/300**



**Inoxi 292-25/210**

The designer or the developer should ensure that the profile doors have sufficient hand clearance. In some door designs on the market, the edge of the handle may be located too close to the door frame.

---

# ABLOY® INOXI LEVER HANDLES FOR PROFILE DOORS



**Inoxi 3-19/0545**



**Inoxi 3-19ss/0545**



**Inoxi 3-19s/0545**



**Inoxi 3-19st/0545**



**Inoxi 23/0545**



**Inoxi 21/0545**



**Inoxi 24/0545**

The designer or the developer should ensure that the profile doors have sufficient hand clearance. In some door designs on the market, the edge of the handle may be located too close to the door frame.



[www.abloy.com](http://www.abloy.com)

Abloy Oy  
Tohlopinranta 28  
FIN-33270 TAMPERE  
tel. +358 3 284 0111  
fax +358 3 284 0280

